

## Technical Data Sheet

AISI-301

### General Presentation

AISI-301 is an AISI-302 modification in which the chromium and nickel contents are reduced to increase the cold work-hardening range. This enables rolling to achieve higher tensile strengths with less ductility loss than AISI-302.

### Classification

Austenitic stainless steel

### Application

AISI-301 is used in making rail car structural components, air frame sections, highway trailer components, automotive wheel covers, wiper blade clips and holders, stove element clips, screen frames, toaster springs, curtain walls.

### Processing

AISI-301 is annealed in solution at temperatures ranging from 1010 °C to 1120 °C, followed by rapid cooling. A low temperature range is used for intermediate annealing. This stainless steel is not suitable for thermal hardening.

### Forming

AISI-301 is easy to form and draw. Intermediate annealing may be required for severe drawing and forming operations due to its high work-hardening rate.

### Weldability

AISI-301 is appropriate for all standard welding methods. As a filler metal, AISI-308L is recommended. In order to achieve maximum corrosion resistance, AISI-301 welded parts must be annealed. The goal of welding and annealing is to remove the high strength caused by cold rolling.

### Corrosion

The corrosion resistance of stainless steel AISI-301 is comparable to that of stainless steel AISI-304. This grade has good corrosion resistance in mildly corrosive environments at room temperature.

## Technical Data Sheet

AISI-301

### Chemical Properties

Chemical properties of the alloy is given below (maximum values unless indicated otherwise).

Name	Number	C (%)	Si (%)	Mn (%)	P (%)	S (%)	Cr (%)	Mo (%)	Ni (%)	N (%)
X10CrNi18-8	1.4310	0,05 to 0,15	2,00	2,00	0,045	0,015	16,0 to 19,0	0,80	6,0 to 9,5	0,10

### Mechanical Properties

The following table summarizes the mechanical properties at room temperature (minimum values).

Tensile S. (MPa), Rm	Yield S. (MPa), Rp 0,2	Elongation (%)	Elastic Modulus (GPa)
600-950	250	40	193

### Some Physical Properties


Thermal conductivity at 20 °C (W/(m.K))	Specific thermal capacity at 20 C° J/(kg.K)	Electrical resistivity at 20 °C (Ω.mm <sup>2</sup> /m)
15	500	0.73

### Comparison With Different Stainless Steel Grades

	AISI-301	AISI-304	AISI-316L
% C + N	0.15 / 0.25	0.17	0.13
% Ni min. / max.	6.0 / 9.5	8.0 / 10.5	10.0 / 13.0
% Cr min. / max.	16.0 / 19.0	17.5 / 19.5	16.5 / 18.5
% Mo min. / max.	0.8	-	2.0 / 2.5

### Corrosion Resistance

PRE value of each alloy is given on the graph below. AISI-301 is indicated with red dot on graph.

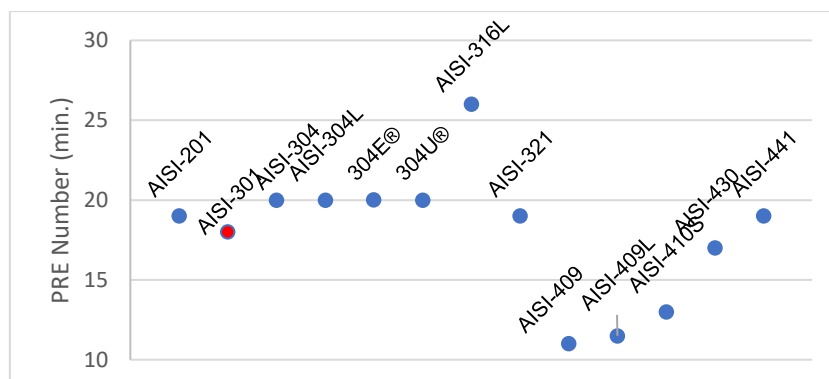

# Technical Data Sheet

AISI-301

## Available Products

Process	Alloy Type	Alloy (AISI)	EN No.	Surface	Product Type	Range		
						thickness (mm)	width (mm)	length (cm)
Cold rolled + Solution annealed	Austenitic	201	1.4372	2B, 2D, 2H, 2J, 2C, NO:4, SB	Coil, strip, sheet, plate, disc	0,25-3	50-1300	20-600 or coil
		301	1.4310					
		304/304L	1.4301/1.4307					
		304E@/304U@	-					
		316L	1.4404					
	321	1.4541						
	Ferritic	409/409L	1.4512					
		410S	1.4000					
		430	1.4016					
		441	1.4509					

## Geometrical Properties

The tolerances of thickness according to TS EN ISO 9445-2 Standard is given below (dimensions in millimeters).

Specified thickness (t)	Special tolerances for a specified width of	
	$w \leq 1000$	$1000 < w \leq 1300$
$t < 0,30$	$\pm 0,030$	-
$0,30 \leq t < 0,40$	$\pm 0,030$	$\pm 0,035$
$0,40 \leq t < 0,50$	$\pm 0,035$	$\pm 0,035$
$0,50 \leq t < 0,60$	$\pm 0,035$	$\pm 0,035$
$0,60 \leq t < 0,80$	$\pm 0,040$	$\pm 0,040$
$0,80 \leq t < 1,00$	$\pm 0,040$	$\pm 0,050$
$1,00 \leq t < 1,20$	$\pm 0,050$	$\pm 0,055$
$1,20 \leq t < 1,50$	$\pm 0,055$	$\pm 0,060$
$1,50 \leq t < 2,00$	$\pm 0,065$	$\pm 0,070$
$2,00 \leq t < 2,50$	-	-
$2,50 \leq t < 3,00$	-	-

The tolerances on width for cold-rolled wide strip and sheet/plate cut from cold-rolled wide strip mill edges is given below (dimensions in millimeters).

Tolerances for a specified width of	
$600 \leq w < 1000$	$1000 \leq w \leq 2100$
+25 0	+30 0

The tolerances on sheet-plate cut from cold-rolled wide strip mill edges is given below (dimensions in millimeters).

Tolerance	
Length	Normal
$\leq 1500$	+5 /0

## Technical Data Sheet

### AISI-301

- For thickness tolerances, EN/2 is in our productibility.
- The width tolerances are for slit edge materials.

### Edge Wave, Flatness Tolerances

- According to standard h/l rate is 0.03 max.
- For clients with special requests on flatness we can produce EN/2.

### Sheet/plate

- Minimum sheet length is 200 mm, maximum sheet length is 6000 mm.
- Minimum width is 425 mm, maximum width is 1300 (1500 mm is available for contract manufacturing).
- Producibile thicknesses are between 0,3 – 3 mm.
- The above mentioned min. and max. Values are machine manufacturability. Information should be obtained from planning for plate combinations.
- Sheets can be filmed.
- Sheets can be labeled.

Mandrel Dia. (mm)	Thickness (mm)		Width (mm)		Length (cm)		Mandrel Tonnage	Packet Tonnage
	Min.	Max.	Min.	Max.	Min.	Max.	Max.	Max.
503	0,5	3	425	1500	20	600	10	2,5

### Strip

- Strip inner diameter is 508 mm.
- For thicknesses of 0.90 mm and above, the slitting process is combined as 50 mm\*15mm. The strip outer diameter is a maximum of 1750 mm.
- For thicknesses below 0.90 mm, the slitting process is combined as 50 mm \* 15 mm. Maximum roll weight should be 10 tons.
- Slitting is not performed in thicknesses below 0.30 mm thickness.
- Paper wrapping is not possible for strips under 350 mm width.
- For thicknesses over 1.80 mm, the slitting process should be asked to the planning department.
- Thin film coating can be done on the edge cutting.
- It is possible to label on the edge cut rolls.

Cutting Type	Mandrel Dia. (mm)		Thickness (mm)		Width (mm)	
	Entry	Exit	Min.	Max.	Min.	Max.
Edge Cutting	508 - 610	508 - 610	0,3	3	300	1280
Multi Slitting	508 - 610	508 - 610	0,6	3	40	-

Technical Data Sheet  
AISI-301  
**Subjected Certificates and Standards**

**Certificates:**


- TS EN ISO 9001:2015
- TS EN ISO/IEC 17025:2017
- TS EN ISO 9001:2015 EN AS 9100:2018
- IATF 16949:2016
- TS ISO 10002:2018
- 2014/68/EU: EN 764-5, section 4.2 and AD 2000-Merkblatt W0
- TS EN 10088-2:2014,
- 2001/95/EC General Product Safety Directive
- 1935/2004 EU Food Contact Regulations (EC)
- 98/79/EC In Vitro Diagnostics Medical Devices and Repealing Directive
- EU 2017/745 Medical Devices
- EU NO 305/2011 Construction Products Regulation
- 2011/65/EU Restriction of Hazardous Substances Directive ROHS
- 2016/26/EU, 2017/225/EU, 2018/35/EU REACH
- 2014/34/EU ATEX

**Standards:**

- TS EN 10088-2:2014,
- TS EN 10088-4:2013,
- TS EN 9445-2:2010,
- TS EN 10028-7:2016,
- TS 3157 EN ISO 3651-2:2000,
- ASTM A240/A240M-22b-2022,
- ASTM A480/A480M-22a-2022,
- ASME SA 240/SA 240M-2021,
- ASME SA 480/SA 480M-2021,
- ASTM A262,
- EN 764-5 Section 4.2,
- ISPM 15:2019 Fumigation



İrfan Can DİNÇER, B.Sc.  
**Metallurgical & Materials Engineer**  
**Quality and R&D Engineer**

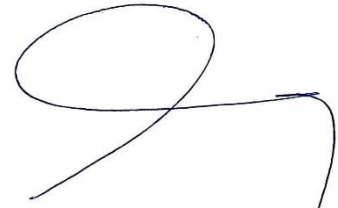

Eur. Ing. Hamdi EKİCİ, Ph.D.  
**Metallurgical & Materials Engineer**  
**Quality and R&D Manager**